



MIRO-Fin

MIRO[®]-Fin

LASER WELDED ABSORBER FIN PRODUCTION

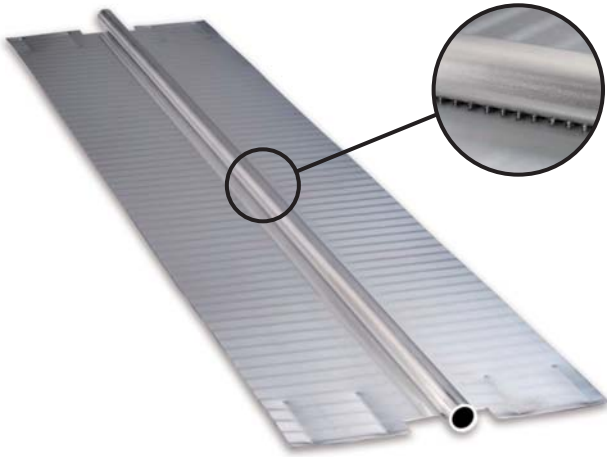

MIRO[®]-Fin overlap

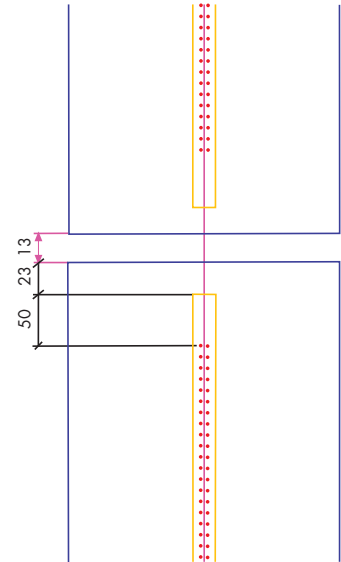

Laser Welded for Maximum Durability
Powered by mirotherm[®] - 95% Absorption 5% emission

Standard Fin Width: 4.72" / 120mm
Min fin width: 3.9" / 100mm
Max fin width: 6.3" / 160mm

Thickness of mirotherm[®] sheet material:

Standard: 0.02" / 0,5mm
available in: 0.015" / 0,4mm as well


Copper Tube:

Standard Tube Wall thickness: 0.015" / 0,4mm
Tube diameter possibilities: 0.393" / 10,0mm OD or
1/2" / 12,7mm OD

Fin end possibilities:

Overlap or Standard

MIRO[®]-Fin standard

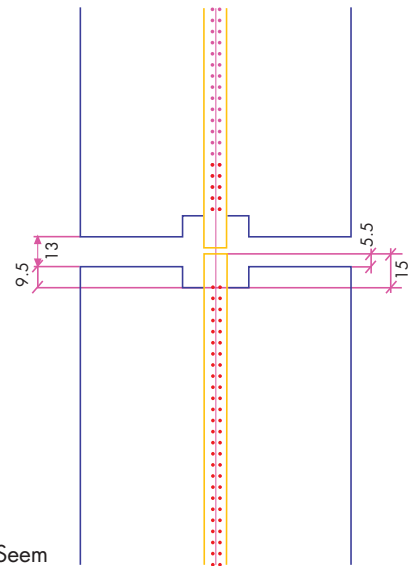

..... Laser Welding Seam

